

Internal Wired Light Towers

Will-Burt manufactures a line of telescoping lighting towers with internal wires to ensure a clean external appearance and protect the cable. These light towers provide up to 6000 watts of quartz halogen light in various heights like our other vertical light towers.


- HIGH STRENGTH HEAT TREATED ALUMINUM ALLOY TUBES AND COLLARS.
- TWO FULL LENGTH EXTERNAL KEYWAYS TO MAINTAIN DIRECTIONAL AZIMUTH.
- LOW FRICTION SYNTHETIC BEARINGS FOR SMOOTH OPERATION AND LONG LIFE.
- BUMPERS TO REDUCE SHOCK.
- ALL EXTERIOR ALUMINUM SURFACES ARE ANODIZED AND SEALED.
- FASTENERS AND FITTINGS ARE PLATED STEEL OR STAINLESS STEEL FOR CORROSION RESISTANCE.

STANDARD EQUIPMENT

- Mounting hardware; internal (through the roof), or external.
- Rotatable base plate with turning handles to allow for directional positioning of lights.

MODEL	NESTED HEIGHT	EXTENDED HEIGHT	LIGHTING
5-15-1000I	5' (1.5m)	15'1" (4.6m)	2- 500 W/115 VAC OR 230 VAC
5-15-2000I			2-1000 W/115 VAC OR 230 VAC
5-15-3000I			2-1500 W/115 VAC OR 230 VAC
5-15-4000I			4-1000 W/115 VAC OR 230 VAC
5-15-6000I			4-1500 W/115 VAC OR 230 VAC
6-20-1000I	6' (1.8m)	20'11" (6.4m)	2- 500 W/115 VAC OR 230 VAC
6-20-2000I			2-1000 W/115 VAC OR 230 VAC
6-20-3000I			2-1500 W/115 VAC OR 230 VAC
6-20-4000I			4-1000 W/115 VAC OR 230 VAC
6-20-6000I			4-1500 W/115 VAC OR 230 VAC
7-25-1000I	7' (2.1m)	23'9" (7.2m)	2- 500 W/115 VAC OR 230 VAC
7-25-2000I			2-1000 W/115 VAC OR 230 VAC
7-25-3000I			2-1500 W/115 VAC OR 230 VAC
7-25-4000I			4-1000 W/115 VAC OR 230 VAC
7-25-6000I			4-1500 W/115 VAC OR 230 VAC
8-30-1000I	8' (2.4m)	28'9" (8.8m)	2- 500 W/115 VAC OR 230 VAC
8-30-2000I			2-1000 W/115 VAC OR 230 VAC
8-30-3000I			2-1500 W/115 VAC OR 230 VAC
8-30-4000I			4-1000 W/115 VAC OR 230 VAC
8-30-6000I			4-1500 W/115 VAC OR 230 VAC

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

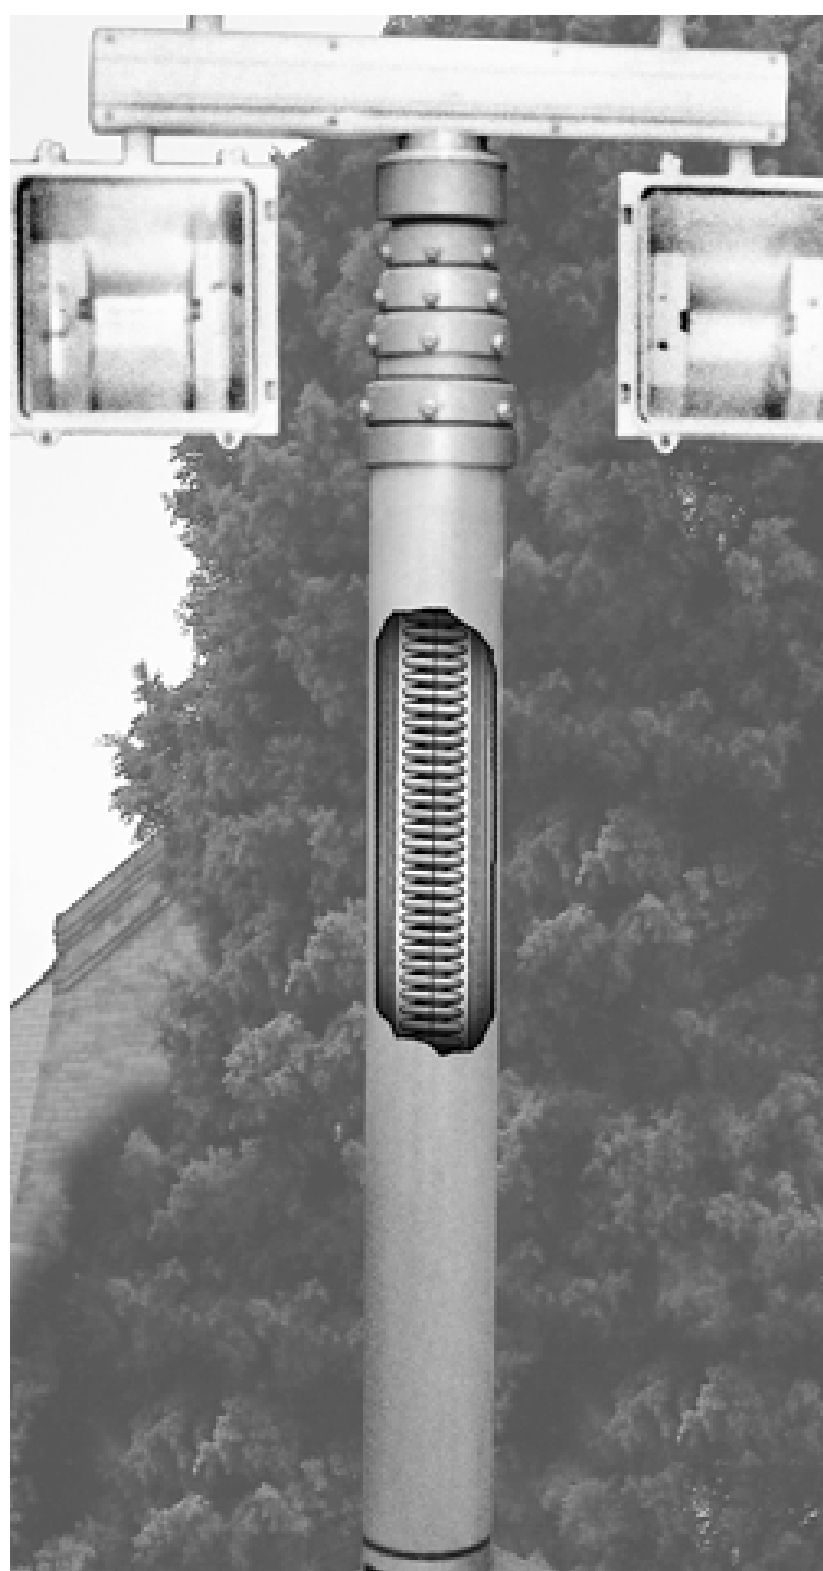

DISTRIBUTED BY:

Direction Technology, Inc. PO Box 911, Centreville, Virginia 20122-0911

(703) 222-6275 Phone (703) 222-1096 Fax email: dtione@erols.com Website:directionfinder.com

